

M04

Weighing Controller Plastic Version



M04 weighing controller is designed for dynamic weighing applications like: packing, bulking, and liquid filling, widely used in grain and seeds, feeds, fertilizer, cement and concrete, and the chemical industries.

DESCRIPTION



Application Software

Multiple Software Selections:

- M04-2 Simplex packing;
- M04-D Duplex packing;
- M04-4 Reduce weight method packing;
- M04-5 Bulk Scale (continuous weighing);
- M04-6/6D Liquid filling(simplex/duplex);

Highlight Features

Button Functions

Quick access key can be set to facilitate formulation selection, batch setting, parameter calibration and other operations.

Auxiliary logic programming function

Up to 6 sets of logic trigger signals can be defined and simple logic signal output can be configured to control the upper barrel, gland, coding and other auxiliary devices.




Database

It can store 20 groups of recipes. For each formula can input target value, fast/slow feed drop value and other parameters.

Intelligent feeding control

Automatic adjustment of fast feeding, slow feeding, filling scale speed and accuracy to achieve the best.

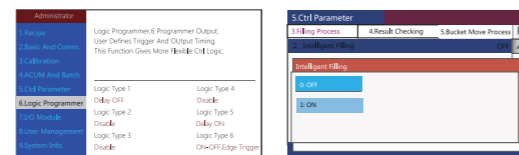

Multiple Communication Methods

- RS232 + RS232/RS485 selectable;
- M04-2, M04-4, M04-5, M04-6: 8 Inputs/12 Outputs
M04-D, M04-6D: 12 Inputs/17 Outputs for starting, stopping, zeroing, clamping/loosening bags, etc.;
- Modbus TCP for connecting PC, PLC, printer etc. (M04-2 & M04-5);
- USB for importing and exporting data or working parameters, upgrading software or customizing boot screen.;



M04

Weighing Controller Stainless Steel Version



M04 weighing controller is designed for dynamic weighing applications like: packing, bulking, and liquid filling, widely used in grain and seeds, feeds, fertilizer, cement and concrete, and the chemical industries.


DESCRIPTION



Application Software

Multiple Software Selections:

- M04-2 Simplex packing;
- M04-D Duplex packing;
- M04-4 Reduce weight method packing;
- M04-5 Bulk Scale (continuous weighing);
- M04-6/6D Liquid filling(simplex/duplex);

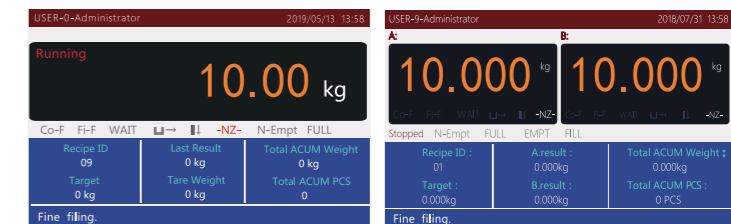

Industrial Design

- Stainless steel case, robust and durable;
- 5-inch LCD screen plus button input, user-friendly operation;
- 20 species formula for different weight ranges and materials packing;



Multiple Communication Methods

- RS232 + RS232/RS485 selectable;
- M04-2, M04-4, M04-5, M04-6: 8 Inputs/12 Outputs
M04-D, M04-6D: 12 Inputs/17 Outputs for starting, stopping, zeroing, clamping/loosening bags, etc.;
- Modbus TCP for connecting PC, PLC, printer etc. (M04-2 & M04-5);
- USB for importing and exporting data or working parameters, upgrading software or customizing boot screen.;




Specifications

General Specifications	Model	M04
	Power supply	AC 90~260V 50Hz(60Hz) ±2%
	Working temperature	-10°C~40°C
	Maximum humidity	90% R.H without dew
	Approval standards	OIML R76, ClassIII 6000 e, 1 μ V/e
	IP grade	IP65 (front panel)
A/D Conversion	A/D performance	24 bit Delta-Sigma
	A/D conversion speed	120/240/480/960 times/sec
	Non-linearity	0.01%F.S
	Gain drift	10PPM/°C
	Input sensitivity	0.02μV/d
	Display accuracy	1/100,000
	Input range	0.02~15mV
	Sensor power supply	DC5V 125mA(Max)
	Input impedance	10MΩ
	Zero steady range	Maximum 0.002 ~ 15mV(Load Cell 3mV/V)
Application Software	1.M04-2 Simplex packing;	
	2.M04-D Duplex packing;	
	3.M04-4 Reduce weight method packing;	
	4.M04-5 Bulk scale (continuous weighing);	
	5.M04-6/6D Liquid filling(simplex/duplex);	

Dimension

Unit:mm

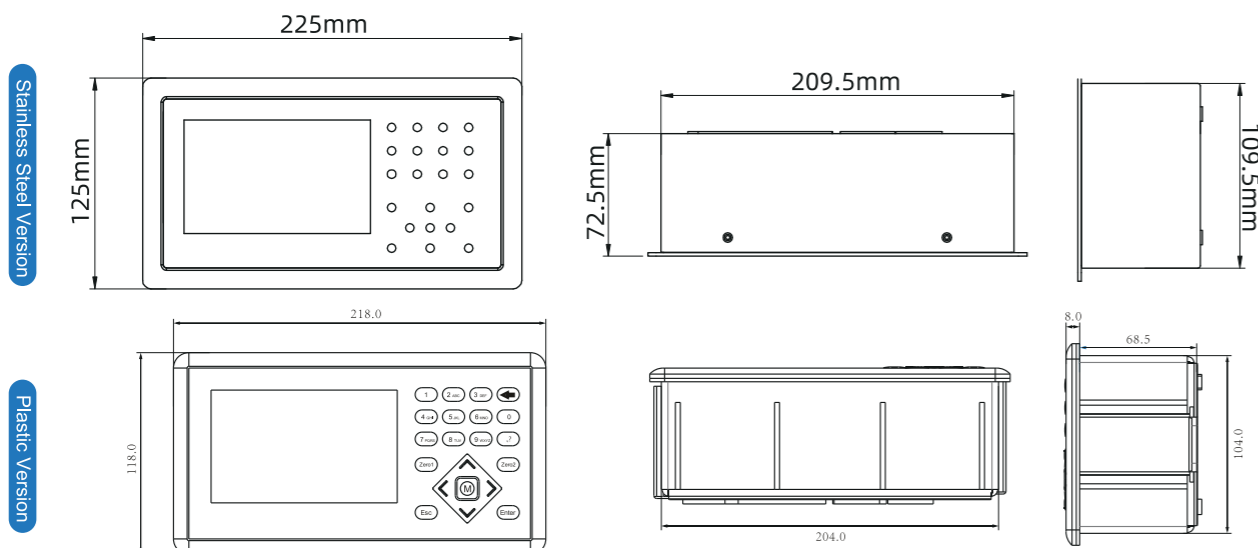

*Specification and dimension may be upgraded, please consult sales manager for the latest info.

Application

